

2S ONLY

INTERNATIONAL FEDERATION OF MODEL AUTO RACING

Batteries received by IFMAR for approval, from 2013. NOTE: Batteries shown on lists: 2010 - 2012 are also allowed.

IFMAR rules do not limit capacity or power output of batteries. Values below are Manufacturers data. -- Packs factory sealed (glue, weld etc).

Battery packs must be able to be disconnected within the Car quickly without the use of tools. Direct soldering is not allowed.

It is essential that batteries on this list are charged using a 2S LiPo compatible charger. It is advisable to restrict charge rates to 1C.

It is strictly NOT ALLOWED, to charge Lithium Batteries to give an output voltage exceeding :-

2S LiPo - 8.40v. 2S LiFe - 7.40v.

Closed LiPo 'Sack' must be used when charging.

2023 IFMAR PRODUCTS LIST -- 2S Stick and 2S Saddle Lithium Batteries. 11.03.23





BATTERIES ON THIS HOMOLOGATION LIST HAVE BEEN CERTIFIED FOR COMPLIANCE WITH UN38.3, TESTS T1-T8.

Submitted by:	Label Details, Part #	Illustration only	Manufacturer Supplied Data.	IFMAR measured Specification,	Approval Date
BATTERIES BELOW THIS LEVEL ARE APPROVED BY IFMAR FOR 2023 WORLD CHAMPIONSHIP EVENTS.					
2S LiPo STICK BATTERIES					
Associated Electrics	Reedy Zappers SG5 # 27396		Reedy LiPo 2S 7.6v. 36.48 Wh. 90C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 158/172 g.	11.03.23
Associated Electrics	Reedy Zappers SG5 # 27382		Reedy LiPo 2S 7.6v. 49.0 Wh. 90C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 216/234 g.	11.03.23
Kiel Technology	Fyrwork ECP plus # F45200-2S2P		Kiel LiPo 2S 7.4v. 33.3 Wh. 200C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	11.03.23
Kiel Technology	Fyrwork ECP plus # F60130-2S2P		Kiel LiPo 2S 7.4v. 44.4 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 213/231 g.	11.03.23
Kiel Technology	Fyrwork ECP plus # F63130-2S2P HV		Kiel LiPo 2S 7.6v. 47.8 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 210/228 g.	11.03.23
Kiel Technology	Fyrwork ECP plus # F82130-2S2P		Kiel LiPo 2S 7.4v. 60.6 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 306/332 g.	11.03.23
Kiel Technology	Fyrwork ECP plus # F90130-2S2P HV		Kiel LiPo 2S 7.6v. 68.4 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 305/331 g.	11.03.23
LRP	LRP G4.1 LCG Stock Spec # 432287		LRP LiPo 2S 7.6v. 28.1 Wh. 135C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	11.03.23
LRP	LRP G4.1 LCG Modified # 432273		LRP LiPo 2S 7.6v. 31.9 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 154/166 g.	11.03.23

LRP	LRP G4.1 HV Stock Spec. # 432285		LRP LiPo 2S 7.6v. 47.1 Wh. 135C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 216/234 g.	11.03.23
Nosram	Nosram G4.1 HV Stock Spec. # 999743		Nosram LiPo 2S 7.6v. 28.1 Wh. 135C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	11.03.23
Nosram	Nosram G4.1 Modified # 999753		Nosram LiPo 2S 7.6v. 31.9 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 154/166 g.	11.03.23
Nosram	Nosram G4.1 HV Stock Spec. # 999759		Nosram LiPo 2S 7.6v. 47.1 Wh. 135C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 215/233 g.	11.03.23
ProTek RC	ProTek RC # PTK-5117-22		ProTek LiPo 2S 7.6v. 36.5 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 158/172 g.	11.03.23
ProTek RC	ProTek RC # PTK-5102-22		ProTek LiPo 2S 7.6v. 38.0 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.23
ProTek RC	ProTek RC # PTK-5114-22		ProTek LiPo 2S 7.6v. 48.6 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 211/229 g.	11.03.23
Ruddog Dist.	Ruddog # RP-0678		Ruddog LiPo 2S 7.6v. 34.4 Wh. 150C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 153/165 g.	11.03.23

BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2022 AND ARE ALLOWED AT 2023 EVENTS.

2S LiPo STICK BATTERIES

Associated Electrics	Reedy Zappers SG5 # 27381		Reedy LiPo 2S 7.6v. 46.0 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 235/255 g.	27.04.22
Associated Electrics	Reedy Zappers SG5 # 27380		Reedy LiPo 2S 7.6v. 52.0 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 274/296 g.	27.04.22
Freemax Technology	Arrowmax # AM 700205		Freemax Tech LiPo 2S 7.4v. 42.9 Wh. 130C Max charge rate: 1C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 212/230 g.	27.04.22
Freemax Technology	Arrowmax # AM 700106		Freemax Tech. LiPo 2S 7.4v. 60.7 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 314/340 g.	27.04.22


Intellect Pioneering Battery Technology	IP Platinum Series # BG2S4800PT2		Intellect LiPo 2S 7.6v. 36.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 158/172 g.	27.04.22
Intellect Pioneering Battery Technology	IP Platinum Series # CC2S5900PT2		Intellect LiPo 2S 7.6v. 45.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 235/255 g.	27.04.22
Intellect Pioneering Battery Technology	IP Platinum Series # BG2S6400PT2		Intellect LiPo 2S 7.6v. 49.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 211/229 g.	27.04.22
Intellect Pioneering Battery Technology	IP Platinum Series # CC2S7000PT2		Intellect LiPo 2S 7.6v. 53.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 274/296 g.	27.04.22
Italtrading	EZ-Power # EZP6100/2		Ital LiPo 2S 7.6v. 46.4 Wh. 140C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 235/255 g.	27.04.22
Italtrading	EZ-Power # EZP6800/2		Ital LiPo 2S 7.6v. 51.7 Wh. 140C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 274/296 g.	27.04.22
LRP	LRP G4.1 HV LCG Modified # 432282		LRP LiPo 2S 7.6v. 44.8 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 241/261 g.	27.04.22
LRP	LRP G4 Modified # 431271		LRP LiPo 2S 7.6v. 50.9 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	27.04.22
Nosram	Nosram G4.1 HV Stock Spec. # 999747		Nosram LiPo 2S 7.6v. 41.8 Wh. 135C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 229/249 g.	27.04.22
Nosram	Nosram G4.1 HV LCG Modified # 999758		Nosram LiPo 2S 7.6v. 44.8 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 239/259 g.	27.04.22
Nosram	Nosram G4 Modified # 999657		Nosram LiPo 2S 7.6v. 50.9 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	27.04.22
Premium RC	Corsatec # CT10001		Corsatec LiPo 2S 7.6v. 48.6 Wh. 138C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 210/228 g.	27.04.22
Premium RC	Corsatec # CT10012		Corsatec LiPo 2S 7.6v. 56.2 Wh. 138C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 258/280 g.	27.04.22






Premium RC	Corsatec # CT10011		Corsatec LiPo 2S 7.6v. 63.8 Wh. 138C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 288/312 g.	27.04.22
Shenzhen Grepow	GensAce Redline # GEA4000 2S13D4		GensAce LiPo 2S 7.6v. 30.4 Wh. 130C Max charge rate: 1C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 135/147 g.	27.04.22
Shenzhen Grepow	GensAce Redline # GEA5100 2S13D5		GensAce LiPo 2S 7.6v. 38.8 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 191/207 g.	27.04.22
Shenzhen Grepow	GensAce Redline # GEA6000 2S13D5		GensAce LiPo 2S 7.6v. 45.6 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 210/228 g.	27.04.22
United Sino Enterprises	ORCA Infinite X # LP21IN243TS		United Sino Ent. LiPo 2S 7.4v. 31.8 Wh. 135C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 156/168 g.	27.04.22
United Sino Enterprises	ORCA Infinite X # LP21B2S61SL		United Sino Ent. LiPo 2S 7.4v. 45.0 Wh. 135C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 234/254 g.	27.04.22
United Sino Enterprises	ORCA Infinite X # LP21BL2S64T		United Sino Ent. LiPo 2S 7.4v. 47.3 Wh. 135C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 278/302 g.	27.04.22
United Sino Enterprises	ORCA Infinite X # LP21BL2S86T		United Sino Ent. LiPo 2S 7.4v. 63.6 Wh. 135C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 308/334 g.	27.04.22
Xiamen 3-Circles	Sunpadow Platin # JA0031		3-Circles LiPo 2S 7.4v. 29.6 Wh. 130C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 154/166 g.	27.04.22
Xiamen 3-Circles	Sunpadow Platin # JA0018		3-Circles LiPo 2S 7.4v. 40.0 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 214/232 g.	27.04.22
Xiamen 3-Circles	Sunpadow Platin # JA0021		3-Circles LiPo 2S 7.4v. 40.7 Wh. 130C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 241/261 g.	27.04.22
Xiamen 3-Circles	Sunpadow Platin # JA0025H		3-Circles LiPo 2S 7.6v. 49.4 Wh. 140C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 247/267 g.	27.04.22
Xiamen 3-Circles	Sunpadow Platin # JA0032		3-Circles LiPo 2S 7.4v. 59.2 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 306/332 g.	27.04.22

BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2020 AND ARE ALLOWED AT 2023 EVENTS.

2S LIPo STICK BATTERIES







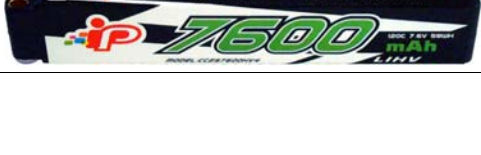
Associated Electrics	Reedy Zappers # 27345		Reedy LiPo 2S 7.6v. 46.0 Wh. 115C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 264/286 g.	01.01.20
Freemax Technology	Arrowmax # AM 700715		Freemax Tech. LiPo 2S 7.4v. 43.7 Wh. 120C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 238/258 g.	01.01.20
Freemax Technology	Arrowmax # AM 700710		Freemax Tech. LiPo 2S 7.4v. 44.4 Wh. 120C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 258/280 g.	01.01.20
Modern Creations	T/Silverback Spiral-G # G5800 1402SIND		Modern Creations LiPo 2S 7.4v. 42.9 Wh. 140C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 238/258 g.	01.01.20
Muchmore Racing	Impact # MLSG- SLCG5800		Muchmore LiPo 2S 7.4v. 43.0 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 230/250 g.	01.01.20
Neidhart SA	Absima # 4150009		Neidhart SA LiPo 2S 7.6v. 33.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 171/185 g.	01.01.20
Neidhart SA	Absima # 4150007		Neidhart SA LiPo 2S 7.6v. 44.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 256/278 g.	01.01.20
Neidhart SA	Absima # 4150008		Neidhart SA LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 209/227 g.	01.01.20
Neidhart SA	Absima # 4150006		Neidhart SA LiPo 2S 7.6v. 63.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 300/324 g.	01.01.20
Neidhart SA	Orion V-Max # ORI 14522		Neidhart SA LiPo 2S 7.6v. 28.9 Wh. 128C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 138/150 g.	01.01.20
Neidhart SA	Orion V-Max # ORI 14523		Neidhart SA LiPo 2S 7.6v. 31.9 Wh. 128C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 170/184 g.	01.01.20
Neidhart SA	Orion V-Max # ORI 14524		Neidhart SA LiPo 2S 7.6v. 47.1 Wh. 128C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	01.01.20

Neidhart SA	Orion V-Max # ORI 14525		Neidhart SA LiPo 2S 7.6v. 54.7 Wh. 128C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 265/287 g.	01.01.20
Neidhart SA	Orion V-Max # ORI 14526		Neidhart SA LiPo 2S 7.6v. 62.3 Wh. 128C Max charge rate: 3C 4 x 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 307/333 g.	01.01.20
Neidhart SA	Performa # PA9374		Neidhart SA LiPo 2S 7.6v. 33.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 170/184 g.	01.01.20
Neidhart SA	Performa # PA9373		Neidhart SA LiPo 2S 7.6v. 47.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 264/286 g.	01.01.20
Neidhart SA	Performa # PA9372		Neidhart SA LiPo 2S 7.6v. 63.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 281/305 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C40002S1P HC61-HV		GensAce LiPo 2S 7.6v. 30.4 Wh. 130C Max charge rate: 1C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 120/130 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C51002S2P HC65-HV		GensAce LiPo 2S 7.6v. 38.8 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/220 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C58002S1P HC56-HV		GensAce LiPo 2S 7.6v. 44.1 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 216/234 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C60002S2P HC57-HV		GensAce LiPo 2S 7.6v. 45.6 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 264/286 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C66002S1P HC57-HV		GensAce LiPo 2S 7.6v. 50.2 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	01.01.20
Shenzhen Grepow	GensAce Redline # 130C82002S1P HC58-HV		GensAce LiPo 2S 7.6v. 62.3 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 286/310 g.	01.01.20
United Sino Enterprises	ORCA Infinite X # LP19IN2S60T		United Sino Ent. LiPo 2S 7.4v. 44.4 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 239/259 g.	01.01.20
United Sino Enterprises	ORCA Infinite X # LP19IN2S65T		United Sino Ent. LiPo 2S 7.4v. 48.1 Wh. 130C Max charge rate: 1C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	01.01.20

Xiamen 3-Circles	Sunpadow Platin # JA0006		3-Circles LiPo 2S 7.4v. 31.1 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 182/198 g.	01.01.20
Xiamen 3-Circles	Sunpadow Platin # JA0004		3-Circles LiPo 2S 7.4v. 38.5 Wh. 110C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	01.01.20
Xiamen 3-Circles	Sunpadow Platin # JD0002		3-Circles LiPo 2S 7.4v. 38.5 Wh. 130C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 235/255 g.	01.01.20
Xiamen 3-Circles	Sunpadow Platin # JA0001		3-Circles LiPo 2S 7.4v. 44.4 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 270/292 g.	01.01.20
Xiamen 3-Circles	Sunpadow Platin # JA0003		3-Circles LiPo 2S 7.4v. 60.7 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 304/330 g.	01.01.20





BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2019 AND ARE ALLOWED AT 2023 EVENTS.

2S LiPo STICK BATTERIES

Associated Electrics	Reedy Zappers # 27338		Reedy LiPo 2S 7.6v. 32.0 Wh. 80C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	28.02.19
Associated Electrics	Reedy Zappers # 27336 (Was # 27323)		Reedy LiPo 2S 7.6v. 45.0 Wh. 80C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 207/225 g.	28.02.19
Intellect Battery	IP # BG2S5000HV4		Intellect LiPo 2S 7.6v. 38.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	28.02.19
Intellect Battery	IP # BG2S6000HV4		Intellect LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 207/225 g.	28.02.19
Intellect Battery	IP # CC2S6000HV4		Intellect LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	28.02.19
Intellect Battery	IP # CC2S7000HV4		Intellect LiPo 2S 7.6v. 53.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	28.02.19
Intellect Battery	IP # CC2S7600HV4		Intellect LiPo 2S 7.6v. 58.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 293/317 g.	28.02.19

Intellect Battery	IP # CC2S8400HV4		Intellect LiPo 2S 7.6v. 64.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 317/343 g.	28.02.19
LRP	LRP G3 Modified # 430273		LRP LiPo 2S 7.6v. 29.6 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	28.02.19
LRP	LRP G3 Modified # 430286		LRP LiPo 2S 7.6v. 34.2 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 175/189 g.	28.02.19
LRP	LRP G3 Stock spec # 430285		LRP LiPo 2S 7.6v. 44.1 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 211/229 g.	28.02.19
Muchmore Racing	Impact # MLSG-STLCGHV3800		Muchmore LiPo 2S 7.6v. 28.9 Wh. 130C Max charge rate: 1C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 181/197 g.	28.02.19
Nosram	Nosram G3 Modified # 999553		Nosram LiPo 2S 7.6v. 29.6 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	28.02.19
Nosram	Nosram G3 Modified # 999560		Nosram LiPo 2S 7.6v. 34.2 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 175/189 g.	28.02.19
Nosram	Nosram G3 Stock Spec # 999559		Nosram LiPo 2S 7.6v. 44.1 Wh. 130C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 211/229 g.	28.02.19
Neidhart SA	Performa # PA9304		Neidhart SA LiPo 2S 7.4v. 27.0 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 124/134 g.	28.02.19
Neidhart SA	Performa # PA9305		Neidhart SA LiPo 2S 7.6v. 30.0 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 126/136 g.	28.02.19
Neidhart SA	Performa # PA9306		Neidhart SA LiPo 2S 7.4v. 43.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	28.02.19
Neidhart SA	Performa # PA9307		Neidhart SA LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/222 g.	28.02.19
Process Measurement & Analysis	Optipower # OPR 28002S100B		Optipower LiPo 2S 7.4v. 20.7 Wh. 100C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 124/134 g.	28.02.19

Process Measurement & Analysis	Optipower # OPR 33002S100B		Optipower LiPo 2S 7.4v. 24.4 Wh. 100C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 141/153 g.	28.02.19
Process Measurement & Analysis	Optipower # OPR 40002S-B		Optipower LiPo 2S 7.4v. 28.8 Wh. 60C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	28.02.19
ProTek RC	ProTek RC # PTK-5100-19		ProTek LiPo 2S 7.6v. 27.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	28.02.19
ProTek RC	ProTek RC # PTK-5124-19		ProTek LiPo 2S 7.6v. 31.1 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	28.02.19
ProTek RC	ProTek RC # PTK-5102-19		ProTek LiPo 2S 7.6v. 37.2 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 195/211 g.	28.02.19
ProTek RC	ProTek RC # PTK-5114-19		ProTek LiPo 2S 7.6v. 44.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 207/225 g.	28.02.19
RC Concept	Omega # 50C5135000T		RC Concept LiPo 2S 7.6v. 26.6 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 134/146 g.	28.02.19
RC Concept	Omega # 50C5145000T		RC Concept LiPo 2S 7.4v. 33.3 Wh. 100C Max charge rate: 3C 4 mm. Tubes.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 194/210 g.	28.02.19
RC Concept	Omega # 50C514800000		RC Concept LiPo 2S 7.6v. 36.5 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	28.02.19
Team Corally	Corally Voltax HV # 49606		Corally LiPo 2S 7.6v. 45.6 Wh. 120C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	28.02.19
Xiamen 3-Circles	Sunpadow # S638066		3-Circles LiPo 2S 7.4v. 28.1 Wh. 130C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 157/170 g.	28.02.19
Xiamen 3-Circles	Sunpadow # 7150135		3-Circles LiPo 2S 7.4v. 33.3 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 212/230 g.	28.02.19
Xiamen 3-Circles	Sunpadow # S653065		3-Circles LiPo 2S 7.4v. 39.2 Wh. 130C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 243/263 g.	28.02.19

Xiamen 3-Circles	Sunpadow # S684064		3-Circles LiPo 2S 7.4v. 62.2 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 325/353 g.	28.02.19
Yokomo	Yokomo # YB-V235B		Yokomo LiPo 2S 7.4v. 25.9 Wh. 100C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 151/163 g.	28.02.19
Yokomo	Yokomo # YB-V246B		Yokomo LiPo 2S 7.4v. 34.0 Wh. 100C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 205/223 g.	28.02.19
Yokomo	Yokomo # RPB-55LCG		Yokomo LiPo 2S 7.6v. 41.8 Wh. 140C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 232/252 g.	28.02.19
Yokomo	Yokomo # RPB-60LCG		Yokomo LiPo 2S 7.4v. 44.4 Wh. 140C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/301 g.	28.02.19

BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2018 AND ARE ALLOWED AT 2023 EVENTS.

2S LiPo STICK BATTERIES

Associated Electrics	Reedy Zappers # 27321		Reedy LiPo 2S 7.6v. 46.0 Wh. 110C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	21.02.18
Freemax Technology	Arrowmax # AM 700706		Arrowmax LiPo 2S 7.4v. 45.9 Wh. 130C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/300 g.	21.02.18
Freemax Technology	Arrowmax # AM 700105		Arrowmax LiPo 2S 7.4v. 60.7 Wh. 120C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 307/333 g.	21.02.18
Intellect Battery	IP # BG2S5000HV3		Intellect LiPo 2S 7.6v. 38.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 192/208 g.	21.02.18
Intellect Battery	IP # BG2S6000HV3		Intellect LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	21.02.18
Intellect Battery	IP # CC2S6000HV3		Intellect LiPo 2S 7.6v. 46.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	21.02.18
Intellect Battery	IP # CC2S8400HV3		Intellect LiPo 2S 7.6v. 64.0 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 315/341 g.	21.02.18

Italtrading	EZ-Power # EZP6600/2		Ital LiPo 2S 7.6v. 50.2 Wh. 140C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 264/286 g.	21.02.18
LRP	LRP P5 # 430262		LRP LiPo 2S 7.6v. 41.8 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 221/239 g.	21.02.18
LRP	LRP P5 Stock Spec # 430261		LRP LiPo 2S 7.6v. 48.7 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	21.02.18
Modern Creations	Team Silverback Siren HV # HV64001002SINC		Modern Creations LiPo 2S 7.6v. 48.6 Wh. 100C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	21.02.18
Muchmore Racing	Impact # MLI-STLCG4300MP		Muchmore LiPo 2S 7.4v. 31.8 Wh. 120C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 186/202 g.	21.02.18
Muchmore Racing	Impact # MLI-LCG6400FD2		Muchmore LiPo 2S 7.4v. 47.4 Wh. 110C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 260/282 g.	21.02.18
Muchmore Racing	Impact # MLI-MP8200FD3		Muchmore LiPo 2S 7.4v. 60.6 Wh. 120C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 308/334 g.	21.02.18
Neidhart SA	Orion Ultimate HV # ORI 14501		Orion LiPo 2S 7.6v. 26.6 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 124/134 g.	21.02.18
Neidhart SA	Orion Ultimate HV # ORI 14502		Orion LiPo 2S 7.6v. 30.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 138/150 g.	21.02.18
Neidhart SA	Orion Ultimate HV # ORI 14503		Orion LiPo 2S 7.6v. 44.1 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 208/226 g.	21.02.18
Neidhart SA	Orion Ultimate # ORI 14514		Orion LiPo 2S 7.4v. 44.4 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 253/275 g.	21.02.18
Neidhart SA	Orion Ultimate HV # ORI 14505		Orion LiPo 2S 7.6v. 62.3 Wh. 120C Max charge rate: 3C 4 mm. Tubes, 4 off.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 309/335 g.	21.02.18
Nosram	Nosram P5 LCG # 999548		Nosram LiPo 2S 7.6v. 41.8 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 221/239 g.	21.02.18

Nosram	Nosram P5 Stock Spec # 999547		Nosram LiPo 2S 7.6v. 48.7 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	21.02.18
Scorpion	Platinum Series # SCPP-PS3400 BLK		Scorpion LiPo 2S 7.4v. 25.2 Wh. 65C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 131/141 g.	21.02.18
Scorpion	Platinum Series # SCPP-PS6200 BLK		Scorpion LiPo 2S 7.4v. 45.9 Wh. 65C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/300 g.	21.02.18
Scorpion	Platinum Series # SCPP-PS7700 BLK		Scorpion LiPo 2S 7.4v. 57.0 Wh. 65C Max charge rate: 2C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 284/308 g.	21.02.18
Tianco	ORCA Gen. 4 # OBH463H4		Tianco LiPo 2S 7.6v. 47.9 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	21.02.18
Tianco	ORCA Gen. 4 # OBH485V4		Tianco LiPo 2S 7.6v. 64.6 Wh. 120C Max charge rate: 3C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 315/341 g.	21.02.18
Trion	Trion # TB-STLG4300		Trion LiPo 2S 7.4v. 31.8 Wh. 120C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 184/200 g.	21.02.18
Trion	Trion # TB-5000ST		Trion LiPo 2S 7.4v. 37.0 Wh. 110C Max charge rate: 2C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 205/223 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5630046		3-Circles LiPo 2S 7.4v. 22.2 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 144/156 g.	21.02.18
Xiamen 3-Circles	Sunpadow # H640043		3-Circles LiPo 2S 7.6v. 30.4 Wh. 100C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 151/163 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5043126		3-Circles LiPo 2S 7.4v. 37.0 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 266/288 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5042125		3-Circles LiPo 2S 7.4v. 41.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 262/284 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5656040		3-Circles LiPo 2S 7.4v. 41.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 261/283 g.	21.02.18

Xiamen 3-Circles	Sunpadow # 5442125		3-Circles LiPo 2S 7.4v. 44.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/300 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5660041		3-Circles LiPo 2S 7.4v. 44.4 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/300 g.	21.02.18
Xiamen 3-Circles	Sunpadow # H663026		3-Circles LiPo 2S 7.6v. 47.9 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	21.02.18
Xiamen 3-Circles	Sunpadow # 5542125		3-Circles LiPo 2S 7.4v. 48.8 Wh. 120C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 294/318 g.	21.02.18
Xiamen 3-Circles	Sunpadow # H684027		3-Circles LiPo 2S 7.6v. 63.8 Wh. 100C Max charge rate: 3C 4 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 297/321 g.	21.02.18





BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2017 AND ARE ALLOWED AT 202 EVENTS.

2S LiPo STICK BATTERIES

Associated Electrics	Reedy Zappers # 27310		Reedy LiPo 2S 7.6v. 28.0 Wh. 100C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 149/161 g.	11.03.17
Associated Electrics	Reedy Zappers # 27305		Reedy LiPo 2S 7.6v. 37.0 Wh. 100C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 200/216 g.	11.03.17
Associated Electrics	Reedy Zappers # 27307		Reedy LiPo 2S 7.6v. 44.0 Wh. 70C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 215/233 g.	11.03.17
Freemax Metal Products	Arrowmax # AM 700202		Arrowmax LiPo 2S 7.4v. 37.0 Wh. 110C 4 mm. Tubes.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 199/215 g.	11.03.17
Freemax Metal Products	Arrowmax # AM 700203		Arrowmax LiPo 2S 7.6v. 45.6 Wh. 110C 4 mm. Tubes.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	11.03.17
Freemax Metal Products	Arrowmax # AM 700802		Arrowmax LiPo 2S 7.6v. 47.1 Wh. 110C 5 mm. Tubes.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	11.03.17
Intellect Battery	IP # LP2S3600HV2		Intellect LiPo 2S 7.6v. 27.0 Wh. 120C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 142/154 g.	11.03.17

Intellect Battery	IP # BG2S5000HV2		Intellect LiPo 2S 38.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.17
Intellect Battery	IP # BG2S6000HV2		Intellect LiPo 2S 46.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 216/234 g.	11.03.17
Intellect Battery	IP # CC2S6000HV2		Intellect LiPo 2S 46.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	11.03.17
Intellect Battery	IP # CC2S8400HV2		Intellect LiPo 2S 64.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 317/343 g.	11.03.17
Italtrading	EZ-Power # EZP3500/2		Ital LiPo 2S 26.6 Wh. 4 mm. Tubes	7.6v. 140C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 142/154 g.	11.03.17
Italtrading	EZ-Power # EZP4900/2		Ital LiPo 2S 37.2 Wh. 4 mm. Tubes	7.6v. 140C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.17
LRP	LRP # 430258		LRP LiPo 2S 22.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 127/137 g.	11.03.17
LRP	LRP # 430257		LRP LiPo 2S 26.6Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 146/158 g.	11.03.17
LRP	LRP # 430256		LRP LiPo 2S 31.9 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 181/196 g.	11.03.17
LRP	LRP Stock Spec. # 430254		LRP LiPo 2S 35.0 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 196/212 g.	11.03.17
LRP	LRP Stock Spec. # 430255		LRP LiPo 2S 45.6 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 213/231 g.	11.03.17
LRP	LRP # 430252		LRP LiPo 2S 41.8 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 221/239 g.	11.03.17
LRP	LRP Stock Spec. # 430251		LRP LiPo 2S 48.6 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 261/283 g.	11.03.17

LRP	LRP Stock Spec. # 430250		LRP LiPo 2S 60.8 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 321/347 g.	11.03.17
Nosram	Nosram # 999545		Nosram LiPo 2S 31.9 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 181/196 g.	11.03.17
Nosram	Nosram # 999544		Nosram LiPo 2S 41.8 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 221/239 g.	11.03.17
Nosram	Nosram Stock Spec. # 999543		Nosram LiPo 2S 48.6 Wh. 5 mm. Tubes	7.6v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	11.03.17
ProTek RC	ProTek RC # PTK-5100-17		ProTek LiPo 2S 27.4 Wh. 4 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 147/160 g.	11.03.17
ProTek RC	ProTek RC # PTK-5102-17		ProTek LiPo 2S 37.2 Wh. 5 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.17
ProTek RC	ProTek RC # PTK-5114-17		ProTek LiPo 2S 46.4 Wh. 5 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 216/234 g.	11.03.17
ProTek RC	ProTek RC # PTK-5115-17		ProTek LiPo 2S 47.9 Wh. 5 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	11.03.17
ProTek RC	ProTek RC # PTK-5107-17		ProTek LiPo 2S 64.6 Wh. 5 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 317/343 g.	11.03.17
Scorpion	Scorpion Platinum # SCPP-PS5700-BLK		Scorpion LiPo 2S 42.2 Wh. 5 mm. Tubes	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 244/264 g.	11.03.17
Shenzhen Grepow	GensAce # B60C46002S2P H/Case 29		GensAce LiPo 2S 34.0 Wh. 4 mm. Tubes	7.4v. 60C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.17
Xiamen 3-Circles	Sunpadow # 7150135		Sunpadow LiPo 2S 33.3 Wh. 4 mm. Tubes	7.4v. 120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 198/215 g.	11.03.17
Xiamen 3-Circles	Sunpadow # 554383		Sunpadow LiPo 2S 37.7 Wh. 4 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 199/216 g.	11.03.17

Xiamen 3-Circles	Sunpadow # 554385		Sunpadow LiPo 2S 45.6 Wh. 4 mm. Tubes	7.6v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 200/217 g.	11.03.17
Tianco	ORCA Gen. 3 # OBH350SP		Tianco LiPo 2S 38.0 Wh. 5 mm. Tubes	7.6v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	11.03.17
Tianco	ORCA Gen. 3 # OBH363R2		Tianco LiPo 2S 47.9 Wh. 5 mm. Tubes	7.6v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	11.03.17
Yokomo	Racing Performer # RPB-50LCG		Yokomo LiPo 2S 37.0 Wh. 4 & 5 mm. Tubes	7.4v. 140C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 262/284 g.	11.03.17

2S LiPo SADDLE BATTERIES

Intellect Battery	IP # TP2S6000HV2		Intellect LiPo 2S 2 x 3.8v. 2 x 23.0 Wh. 4 mm. Tubes	120C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 261/283 g.	11.03.17
-------------------	---------------------	-----------------------------------------------------------------------------------	---------------------------------------------------------------	------	---------------------------------------------------------------------------------------------	----------

BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2016 AND ARE ALLOWED AT 2023 EVENTS.














2S LiPo STICK BATTERIES

Italtrading	EZ-Power # EZP6200/2		Ital LiPo 2S 46.8 Wh. 4 mm. Tubes.	7.4v. 60C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 303/328 g.	10.01.16 Photo corrected 09.08.16
Intellect Battery	IP # CC2S3500SV1		Intellect LiPo 2S 26.0 Wh. 4 mm. Tubes.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 139/151 g.	10.01.16
LRP	LRP # 430234		LRP LiPo 2S 41.4 Wh. 5mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 257/279 g.	10.01.16
LRP	LRP # 430232		LRP LiPo 2S 55.5 Wh. 5mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 317/343 g.	10.01.16
LRP	LRP # 430235		LRP LiPo 2S 41.4 Wh. 5mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 242/262 g.	10.01.16
LRP	LRP # 430239		LRP LiPo 2S 29.6 Wh. 5mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 179/193 g.	10.01.16
LRP	LRP # 430236		LRP LiPo 2S 33.3 Wh. 5mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 198/214 g.	10.01.16





Muchmore Racing	Impact # MLI-ST5000FD2		Muchmore LiPo 2S 37.0 Wh. 4 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	10.01.16
Nosram	Nosram X-treme Race # 999527		Nosram LiPo 2S 41.4 Wh. 5 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 257/279 g.	10.01.16
Nosram	Nosram X-treme Race # 999525		Nosram LiPo 2S 55.5 Wh. 5 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 317/343 g.	10.01.16
Nosram	Nosram X-treme Race # 999528		Nosram LiPo 2S 41.4 Wh. 5 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 242/262 g.	10.01.16
Nosram	Nosram X-treme Race # 999532		Nosram LiPo 2S 29.6 Wh. 5 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 179/193 g.	10.01.16
Nosram	Nosram X-treme Race # 999529		Nosram LiPo 2S 33.3 Wh. 5 mm. Tubes.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 198/214 g.	10.01.16
Tianco	ORCA Infinite # OBHV63G2		Tianco LiPo 2S 46.6 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 271/293 g.	10.01.16
Neidhart SA	Orion # ORI 14087		Orion LiPo 2S 42.9 Wh. 4mm. Tubes	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 254/276 g.	10.01.16
Neidhart SA	ORION Carbon Pro # ORI 14066		Orion LiPo 2S 31.1 Wh. 4 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 198/214 g.	10.01.16
Neidhart SA	Orion # ORI 14068		Orion LiPo 2S 33.3 Wh. 5mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	10.01.16
Neidhart SA	Orion # ORI 14083		Orion LiPo 2S 37.0 Wh. 4mm. Tubes	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/221 g.	10.01.16
Neidhart SA	Orion # ORI 14081		Orion LiPo 2S 23.7 Wh. 4mm. Tubes	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 125/135 g.	10.01.16
Neidhart SA	Orion # ORI 14082		Orion LiPo 2S 28.1 Wh. 4mm. Tubes	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 146/158 g.	10.01.16

Associated Electrics	Reedy # 316		Reedy LiPo 2S 37.0 Wh. 4 mm. Tubes.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 264/286 g.	10.01.16
Associated Electrics	Reedy # 27301		Reedy LiPo 2S 42.0 Wh. 5 mm. Tubes.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 273/295 g.	10.01.16
Associated Electrics	Reedy # 321		Reedy LiPo 2S 45.0 Wh. 4 mm. Tubes	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 304/330 g.	10.01.16
Modern Creations	Team Silverback Spiral 2 # 6400902SINC		Modern Creations LiPo 2S 47.3 Wh. 5 mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 262/284 g.	10.01.16
Vapex Technology	VP Racing # VP96412		Vapex LiPo 2S 45.0 Wh. 5 mm. Tubes	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 289/313 g.	10.01.16
Vapex Technology	VP Racing # VP96429		Vapex LiPo 2S 58.0 Wh. 5 mm. Tubes	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 296/320 g.	10.01.16
Vapex Technology	VP Racing # VP96436		Vapex LiPo 2S 39.5 Wh. 4 mm. Tubes	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 200/216 g.	10.01.16
Yokomo	Racing Performer # RPB-60L		Yokomo LiPo 2S 44.4 Wh. 4 mm. Tubes.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 298/322 g.	10.01.16
Yokomo	Racing Performer # RPB-50S		Yokomo LiPo 2S 37.0 Wh. 4 mm. Tubes.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	10.01.16
Yokomo	Racing Performer # RPB-39E2K		Yokomo LiPo 2S 28.8 Wh. 4 mm. Tubes.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 154/166 g.	10.01.16
2S LiPo SADDLE BATTERIES						
Neidhart SA	Orion # ORI 14085		Orion LiPo 2S 29.6 Wh. 4 mm. Tubes	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 184/198 g.	10.01.16
BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2015 AND ARE ALLOWED AT 2023 EVENTS.						
2S LiPo STICK BATTERIES						
Associated Electrics	Reedy # 319		Reedy LiPo 2S 29.0 Wh.	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 157/171 g.	16.02.15

Associated Electrics	Reedy # 602		Reedy LiPo 2S 31.0 Wh. 7.4v. 65C Approved 2013. Label updated. Same Spec.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 200/216 g.	16.02.15
Intellect Battery	IP # CC2S6000SV1		Intellect LiPo 2S 44.0 Wh. 7.4v. 100C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 271/293 g.	16.02.15
Intellect Battery	IP # CC2S7800SV1		Intellect LiPo 2S 58.0 Wh. 7.4v. 100C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	16.02.15
Intellect Battery	IP # BG2S5000SV1		Intellect LiPo 2S 37.0 Wh. 7.4v. 100C 5 mm. Tubes	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
LRP	LRP # 430221		LRP LiPo 2S 40.7 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 275/297 g.	16.02.15
LRP	LRP # 430223		LRP LiPo 2S 41.4 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 261/283 g.	16.02.15
LRP	LRP # 430222		LRP LiPo 2S 42.9 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 276/300 g.	16.02.15
LRP	LRP # 430220		LRP LiPo 2S 51.8 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 313/339 g.	16.02.15
LRP	LRP # 430228		LRP LiPo 2S 31.8 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/220 g.	16.02.15
LRP	LRP # 430227		LRP LiPo 2S 33.3 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/220 g.	16.02.15
LRP	LRP # 430229		LRP LiPo 2S 21.5 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 136/148 g.	16.02.15
LRP	LRP # 430218		LRP LiPo 2S 19.2 Wh. 7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 129/139 g.	16.02.15
Muchmore Racing	Impact # MLI-ST4500FD2		Muchmore LiPo 2S 33.3 Wh. 7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 197/213 g.	16.02.15

Nosram	Nosram X-treme Race # 999515		Nosram LiPo 2S 40.7 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 275/297 g.	16.02.15
Nosram	Nosram X-treme Race # 999517		Nosram LiPo 2S 41.4 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 261/283 g.	16.02.15
Nosram	Nosram X-treme Race # 999516		Nosram LiPo 2S 42.9 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 276/300 g.	16.02.15
Nosram	Nosram X-treme Race # 999514		Nosram LiPo 2S 51.8 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 313/339 g.	16.02.15
Nosram	Nosram X-treme Race # 999522		Nosram LiPo 2S 31.8 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/220 g.	16.02.15
Nosram	Nosram X-treme Race # 999521		Nosram LiPo 2S 33.3 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 204/220 g.	16.02.15
Nosram	Nosram X-treme Race # 999523		Nosram LiPo 2S 21.5 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 136/148 g.	16.02.15
Nosram	Nosram X-treme Race # 999512		Nosram LiPo 2S 19.2 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 129/139 g.	16.02.15
Process Measurement & Analysis	Optipower # OPR55002S50B		Optipower LiPo 2S 40.7 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 288/312 g.	16.02.15
Process Measurement & Analysis	Optipower # OPR55002S50FL		Optipower LiPo 2S 40.7 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 298/322 g. Inc. wires.	16.02.15
Process Measurement & Analysis	Optipower # OPR65002S50B		Optipower LiPo 2S 48.1 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 295/319 g.	16.02.15
Process Measurement & Analysis	Optipower # OPR65002S50FL		Optipower LiPo 2S 48.1 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 289/313 g. Inc. wires.	16.02.15
Process Measurement & Analysis	Optipower # OPR70002S50B		Optipower LiPo 2S 51.8 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 300/326 g.	16.02.15









Process Measurement & Analysis	Optipower # OPR70002S50FL		Optipower LiPo 2S 51.8 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 302/328 g. Inc. wires.	16.02.15
ProTek RC	ProTek RC # PTK 5104-15		ProTek LiPo 2S 39.2 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 271/293 g.	16.02.15
ProTek RC	ProTek RC # PTK 5107-15		ProTek LiPo 2S 47.4 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	16.02.15
ProTek RC	ProTek RC # PTK 5102-15		ProTek LiPo 2S 31.5 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
Tianco	ORCA Infinite # OBHV62N8		Tianco LiPo 2S 45.9 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 271/293 g.	16.02.15
Tianco	ORCA Infinite # OBHV48F7		Tianco LiPo 2S 35.5 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
Scorpion	Platinum Series # SCPP-PS6200		Scorpion LiPo 2S 45.9 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 278/302 g.	16.02.15
Scorpion	Platinum Series # SCPP-PS4200		Scorpion LiPo 2S 31.1 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 190/206 g.	16.02.15
Trion	# TB 1333		Trion LiPo 2S 35.5 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
Trion	# TB 1378		Trion LiPo 2S 35.5 Wh. 5 mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
Trion	# TB 1334		Trion LiPo 2S 25.9 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 141/153 g.	16.02.15
Yokomo	Racing Performer # RBP-58R		Yokomo LiPo 2S 42.9 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 263/285 g.	16.02.15
Yokomo	Racing Performer # RBP-35E2		Yokomo LiPo 2S 25.9 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 141/153 g.	16.02.15

Yokomo	Racing Performer # RBP-48S		Yokomo LiPo 2S 35.5 Wh. 5 mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 202/218 g.	16.02.15
2S LiPo SADDLE BATTERIES						
Intellect Battery	IP # TP2S6000SV1		Intellect LiPo 2S 22.0 (x2) Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 267/289 g.	16.02.15
LRP	LRP # 430225		LRP LiPo 2S 40.7 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 265/287 g.	16.02.15
LRP	LRP # 430226		LRP LiPo 2S 27.4 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 180/196 g.	16.02.15
Muchmore Racing	Impact # MLI-IS6000FD2		Muchmore LiPo 2S 44.4 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 267/289 g.	16.02.15
Nosram	Nosram X-treme Race # 999519		Nosram LiPo 2S 40.7 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 265/287 g.	16.02.15
Nosram	Nosram X-treme Race # 999520		Nosram LiPo 2S 27.4 Wh.	7.4v. 110C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 180/196 g.	16.02.15
Process Measurement & Analysis	Optipower # OPR500050BSD		Optipower LiPo 2S 37.0 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 271/293 g.	16.02.15
Process Measurement & Analysis	Optipower # OPR500050FLSD		Optipower LiPo 2S 37.0 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 280/304 g. Inc. wires.	16.02.15
ProTek RC	ProTek RC # PTK 5112-15		ProTek LiPo 2S 38.5 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 267/289 g.	16.02.15
Scorpion	Platinum Series # SCPP-PS5600		Scorpion LiPo 2S 41.4 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 250/270 g.	16.02.15
BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2014 AND ARE ALLOWED AT 2023 EVENTS.						
2S LiPo STICK BATTERIES						
Associated Electrics	Reedy # 313		Reedy LiPo 2S 52.0 Wh. 5mm. Tubes	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 305/331 g.	17.02.14

Hacker Motor	Hacker Top Fuel # 77200277		Hacker LiPo 2S 50.3 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 300/325 g.	17.02.14
Hacker Motor	Hacker Top Fuel # 74500277		Hacker LiPo 2S 31.1 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 199/215 g.	17.02.14
Intellect Battery	IP # CC2S6000V9		Intellect LiPo 2S 44.0 Wh. 5mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	17.02.14
Intellect Battery	IP # CC2S7600V9		Intellect LiPo 2S 56.0 Wh. 5mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 321/348 g.	17.02.14
Italtrading	EZ-Power # EZP7200/2		Ital LiPo 2S 53.0 Wh.	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 307/332 g.	17.02.14
LRP VTEC	VTEC # 430211		LRP LiPo 2S 44.4 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 282/306 g.	17.02.14
LRP VTEC	VTEC # 430210		LRP LiPo 2S 55.5 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 318/345 g.	17.02.14
LRP VTEC	VTEC # 430214		LRP LiPo 2S 34.8 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 213/231 g.	17.02.14
Muchmore Racing	Muchmore Impact # MLI-IH6000SP		Muchmore LiPo 2S 44.4 Wh.	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 278/302 g.	17.02.14
Neidhart SA	ORION Carbon Pro # ORI 14061		Orion LiPo 2S 42.9 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 296/320 g.	17.02.14
Neidhart SA	ORION Carbon Pro # ORI 14059		Orion LiPo 2S 42.9 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 297/321 g.	17.02.14
Neidhart SA	ORION Carbon Pro # ORI 14062		Orion LiPo 2S 50.3 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 301/327 g.	17.02.14
Neidhart SA	ORION Carbon Pro # ORI 14060		Orion LiPo 2S 50.3 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 305/331 g.	17.02.14

Nosram VTEC	Nosram X-treme Race # 999508		Nosram LiPo 2S 44.4 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 282/306 g.	17.02.14
Nosram VTEC	Nosram X-treme Race # 999507		Nosram LiPo 2S 55.5 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 318/345 g.	17.02.14
Nosram VTEC	Nosram X-treme Race # 999511		Nosram LiPo 2S 34.8 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 213/231 g.	17.02.14
nVision	nVision # NVO 1120		nVision LiPo 2S 42.9 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 302/327 g.	17.02.14
nVision	nVision # NVO 1118		nVision LiPo 2S 42.9 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 305/331 g.	17.02.14
nVision	nVision # NVO 1121		nVision LiPo 2S 50.3 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 308/334 g.	17.02.14
nVision	nVision # NVO 1119		nVision LiPo 2S 50.3 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 311/337 g.	17.02.14
Pro Models BVBA	Corally # 48255		Corally LiPo 2S 59.2 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	17.02.14
ProTek RC	ProTek RC # PTK 5104-14		ProTek LiPo 2S 42.9 Wh. 5mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	17.02.14
ProTek RC	ProTek RC # PTK 5107-14		ProTek LiPo 2S 54.7 Wh. 5mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 321/348 g.	17.02.14
Revtech Trinity Epic	RevTech FormulaX # REV2021-5		Revtech LiPo 2S 52.9 Wh. 5mm. Tubes	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 298/322 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B65C50002S2 PH/Case10		Acepow LiPo 2S 37.0 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 282/306 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B65C50002S1 PH/Case42		Acepow LiPo 2S 37.0 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 273/295 g.	17.02.14

Shenzhen Acepow Electronics	Gens ace # B65C53002S1 PH/Case10		Acepow LiPo 2S 39.2 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 290/314 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B45C58002S2 PH/Case10		Acepow LiPo 2S 42.9 Wh.	7.4v. 45C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 293/317 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B50C65002S1 PH/Case10		Acepow LiPo 2S 48.1 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 285/309 g.	17.02.14
Team Powers	Team Powers # TP720075C2S		RC Explorer LiPo 2S 55.0 Wh.	7.4v. 75C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 307/332 g.	17.02.14
Tianco	ORCA Infinite # OB6290G6		Orca LiPo 2S 45.9 Wh. 5mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	17.02.14
Tianco	ORCA Infinite # OB7590GT		Orca LiPo 2S 55.5 Wh. 5mm. Tubes	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 322/348 g.	17.02.14
2S LiPo SADDLE BATTERIES						
Hacker Motor	Hacker Top Fuel # 75700278		Hacker LiPo 2S 40.7 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 277/300 g.	17.02.14
LRP VTEC	VTEC # 430213		LRP LiPo 2S 42.9 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 267/289 g.	17.02.14
Nosram VTEC	Nosram X-treme Race # 999510		Nosram LiPo 2S 42.9 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 267/289 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B25C51001S3 Psaddle12		Acepow LiPo 2S 18.9 Wh. (x2)	7.4v. 25C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 278/301 g.	17.02.14
Shenzhen Acepow Electronics	Gens ace # B50C57002S3 Psaddle12		Acepow LiPo 2S 42.2 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 274/296 g.	17.02.14
BATTERIES BELOW THIS LEVEL WERE APPROVED BY IFMAR FOR 2013 AND ARE ALLOWED AT 2023 EVENTS.						
2S LiPo STICK BATTERIES						
Shanghai Dualsky	Track & Field # 33843		Dualsky LiPo 2S 47.0 Wh.	7.4v. 75C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 293/317 g.	14.02.13

Intellect Battery	IP # CC2S7200V8		Intellect LiPo 2S 53.0 Wh. 5mm. Tubes	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	14.02.13
Intellect Battery	IP # BG2S4600V8		Intellect LiPo 2S 34.0 Wh.	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/223 g.	14.02.13
LRP VTEC	VTEC # 430205		LRP LiPo 2S 38.5 Wh. Has chassis location.	7.4v. 40C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 242/262 g.	14.02.13
LRP VTEC	VTEC # 430206		LRP LiPo 2S 42.2 Wh.	7.4v. 40C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	14.02.13
LRP VTEC	VTEC # 430201		LRP LiPo 2S 51.8 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 303/328 g.	14.02.13
LRP VTEC	VTEC Big Mama. # 430200		LRP LiPo 2S 53.5 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 311/337 g.	14.02.13
LRP VTEC	VTEC # 430204		LRP LiPo 2S 33.3 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 207/224 g.	14.02.13
Muchmore	Muchmore # MLI- ST4400FD		Muchmore LiPo 2S 32.6 Wh.	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 208/226 g.	14.02.13
Nosram VTEC	Nosram X-treme Race # 999505		Nosram LiPo 2S 38.5 Wh. Has chassis location.	7.4v. 40C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 241/261 g.	14.02.13
Nosram VTEC	Nosram X-treme Race # 999506		Nosram LiPo 2S 42.2 Wh.	7.4v. 40C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 284/308 g.	14.02.13
Nosram VTEC	Nosram X-treme Race # 999501		Nosram LiPo 2S 51.8 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 303/328 g.	14.02.13
Nosram VTEC	Nosram X-treme Race Big Mama # 999500		Nosram LiPo 2S 53.5 Wh.	7.4v. 50C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 311/337 g.	14.02.13
Nosram VTEC	Nosram X-treme Race # 999504		Nosram LiPo 2S 33.3 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 207/224 g.	14.02.13

nVision	nVision # NVO 1114		nVision LiPo 2S 59.2 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 301/326 g.	14.02.13
nVision	nVision # NVO 1113		nVision LiPo 2S 59.2 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 301/326 g.	14.02.13
nVision	nVision # NVO 1112		nVision LiPo 2S 29.6 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/223 g.	14.02.13
Tianco	ORCA Infinite # OB7080G5		Tianco LiPo 2S 51.8 Wh. 5mm. Tubes	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	14.02.13
Tianco	ORCA Infinite # OB45480P4		Tianco LiPo 2S 33.3 Wh.	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/223 g.	14.02.13
Team ORION	ORION Carbon Pro # ORI 14057		Orion LiPo 2S 59.2 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. with wires allowed: - 306/331 g.	14.02.13
Team ORION	ORION Carbon Pro # ORI 14056		Orion LiPo 2S 59.2 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 301/326 g.	14.02.13
Team ORION	ORION Carbon Pro WTS # ORI 14053		Orion LiPo 2S 29.6 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 203/219 g.	14.02.13
Team ORION	ORION Carbon Pro # ORI 14055		Orion LiPo 2S 29.6 Wh.	7.4v. 90C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/223 g.	14.02.13
Protek RC	Protek # PTKLPH5600 2S100P5		Protek LiPo 2S 41.4 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	14.02.13
Protek RC	Protek # PTKLPH7000 2S100P5		Protek LiPo 2S 51.6 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 312/338 g.	14.02.13
Protek RC	Protek # PTKLPH4300 2S100S		Protek LiPo 2S 31.8 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 206/224 g.	14.02.13
Associated Electrics	Reedy # 309		Reedy LiPo 2S 57.0 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 305/331 g.	14.02.13

Associated Electrics	Reedy # 602		Reedy LiPo 2S 31.0 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 200/216 g.	14.02.13
Associated Electrics	Reedy Wolfpack # 736		Reedy LiPo 2S 37.0 Wh.	7.4v. 25C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 254/276 g.	14.02.13
Associated Electrics	Reedy Wolfpack # 738		Reedy LiPo 2S 28.0 Wh.	7.4v. 25C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 199/215 g.	14.02.13
Vapex Technology	VP Racing # VP95057		Vapex LiPo 2S 52.5 Wh.	7.4v. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 300/325 g.	14.02.13
Yokomo	Max Power # YBP257BD		Yokomo LiPo 2S 42.2 Wh.	7.4v. 75C.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 283/307 g.	14.02.13
Hacker Motor	Hacker Top Fuel # 76500277		Hacker LiPo 2S 48.1 Wh.	7.4v. 90C.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 296/320 g.	14.02.13
Hacker Motor	Hacker Top Fuel # 7400277		Hacker LiPo 2S 29.6 Wh.	7.4v. 90C.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 205/223 g.	14.02.13
2S LiPo SADDLE BATTERIES						
Shanghai Dualsky	Track & Field # 33864		Dualsky LiPo 2S 39.2 Wh.	7.4v. 70C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 259/281 g.	14.02.13
Intellect Battery	IP # TP2S6000V8		Intellect LiPo 2S 22.0 Wh. (x2)	7.4v. 80C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 274/297 g.	14.02.13
LRP VTEC	VTEC # 430203		LRP LiPo 2S 42.9 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	14.02.13
Nosram VTEC	Nosram X-treme Race # 999503		Nosram LiPo 2S 42.9 Wh.	7.4v. 55C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	14.02.13
Protek RC	Protek # PTKLPH5500 2S100SP		Protek LiPo 2S 41.1 Wh.	7.4v. 100C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 273/295 g.	14.02.13

Associated Electrics	Reedy # 310		Reedy LiPo 2S 7.4v. 21.0 Wh. (x2) 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 257/278 g.	14.02.13
Associated Electrics	Reedy Wolfpack # 737		Reedy LiPo 2S 7.4v. 18.0 Wh. (x2) 25C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 265/287 g.	14.02.13
Vapex Technology	VP Racing # VP95088		Vapex LiPo 2S 7.4v. 48.0 Wh. 65C	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 280/303 g.	14.02.13
Yokomo	Max Power # YBP259BF		Yokomo LiPo 2S 3.7v.(x2) 21.8 Wh. (x2) 75C.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	14.02.13
Hacker Motor	Hacker Top Fuel # 75000278		Hacker LiPo 2S 7.4v. 40.7 Wh. 90C. Wt. 269/291 g.	Max. dimensions : 139.0 x 47.0 x 25.1 Scrutineers Wt. allowed: - 269/291 g.	14.02.13